


DESCRIPTION

The driver utilized in a constant voltage LED driver for indoor or outdoor applications. Its wide range input voltage and small form factor, makes it suitable for use in both industrial and domestic environments.

ADDITIONAL ADD ON FEATURES




LENGTH	WIDTH	HEIGHT	MOUNTING
9.5"	1.7"	1.14"	8.9"
24.1cm	4.3cm	29cm	22.6cm

FEATURES

- 60W max output power
- Constant voltage output
- Dimming 0-10V
- High PF
- Low THD
- Wide input range 90 - 305 VAC

CONNECTION WIRING

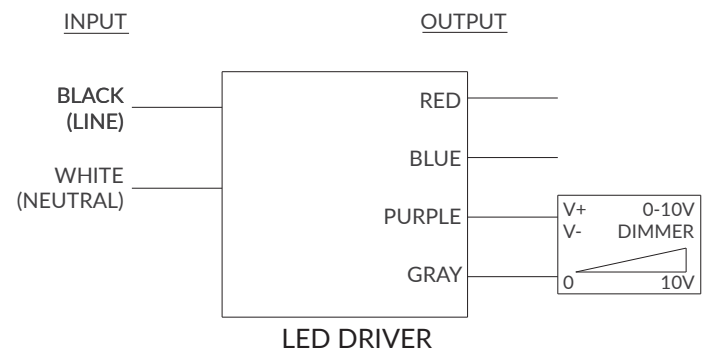

SAFETY & STANDARD COMPLIANCE

- UL compliance
- USR Class2

ELECTRICAL SPECIFICATIONS

Parameter	Nominal	Maximum	Units
Input voltage	120 - 277	90 - 305	VAC
Output voltage	24	24	VDC ^Δ
Input current	0.61 @120V; 0.27 @277V	-	Amp
Output current	5	-	Amp
Leakage current	.75	-	mA
Output power	60	60	W ^Δ
Frequency	50 / 60	-	Hz
Power factor	.95	-	-
THD	-	10	%
Efficiency	83	-	% ^Δ
Protections	OVP, OTP, SC	-	-

ELECTRICAL SPECIFICATIONS

Parameter	Value	Units
Operating temperature	-40 to +90	C
Operating humidity	IP66	-
Isolation voltage (Input to Output)	1860	V